



# Colback® Profloor

The ultimate backbone for premium carpet



For more than four decades leading carpet manufacturers around the world have relied on Colback primary backings. With the launch of Colback Profloor, Colbond has added yet another innovation to its range of high performance nonwovens.

Colback Profloor delivers even greater benefits during carpet manufacture and service life. Its stable filament network, typical of all Colback products, is based on a new polymer composition that

delivers softer tufting, improved stitch holding and optimum dimensional stability of the finished carpet.

Colback Profloor makes it easier to create complex tuft constructions and helps to deliver a smoother carpet

face. Colback Profloor also stops stresses being built-in to carpet tiles during manufacture; as a result, carpet tiles stay flatter and dimensionally more stable during service life.

With Colback Profloor primary backings, the toughest carpet industry standards can be met easily, with a perfect floor as the result.

*Celebrated international designer Marcel Wanders has created Join, a stunning new carpet collection. Working with ANKER's new CL+ technology, Join features structural textile surfaces with a base cut-pile and a top loop-pile that interact with light to create a unique, exclusive and relief-like effect.*


Quality • Performance • Innovation

**COLBOND**

## Unique polymer formulation

Colback Profloor is made of bi-component filaments with a unique skin/core composition.

The polyester core, which all Colback variants have in common, gives it unmatched dimensional stability. Following in-depth polymer research, the skin of Colback Profloor filaments is produced from polypropylene which further improves process behavior during the manufacture of carpet tiles as well as performance of the finished product.



## How Colback Profloor helps optimize your process and finished carpet:

- Enhanced tuftability
  - > Improved process efficiency
- Unmatched stitch holding
  - > Facilitates complex carpet designs with first-class appearance
- Unique process behaviour (no built-in stresses)
  - > Carpet tiles remain flat with superior dimensional stability

## Colback Profloor product range

### Weight range:


70-120 g/m<sup>2</sup>

### Colours:


Gray (PFG) and black (PFB)



## Improved dimensional stability of carpet tiles according to EN 986

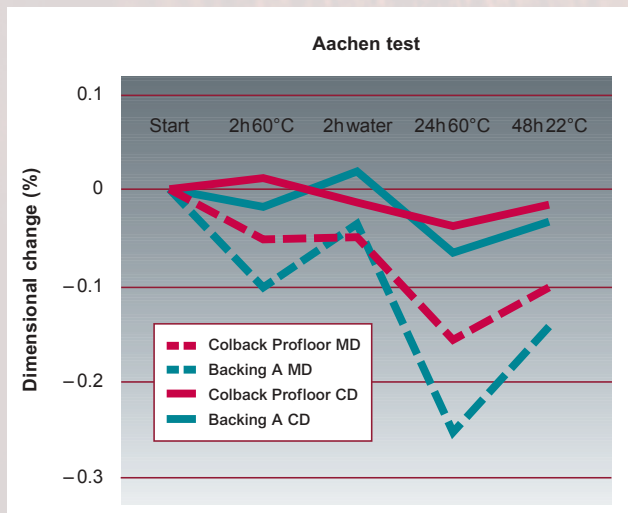

## Enhanced stitch holding during tufting

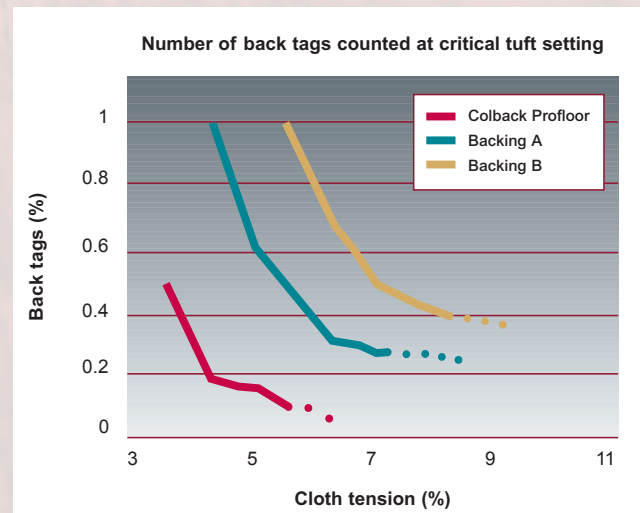

Contact us for a free sample kit or to discuss your specific requirements.

**Colbond bv**  
 P.O. Box 9600  
 6800 TC Arnhem  
 The Netherlands  
 Tel.: +31 85 744 1200  
 Fax: +31 85 744 1210

**Colbond Inc.**  
 P.O. Box 1057  
 Enka, NC 28728  
 United States of America  
 Tel.: +1 828 665 5000  
 Fax: +1 828 665 5065

**Copyright**  
 © 2012 by Colbond bv.  
 © Colback is a registered trademark of Colbond bv.

**Disclaimer**  
 The information in this brochure reflects our best knowledge at the time of publication. We have a policy of continuous development and therefore our products and information may be subject to change. We do not accept liability arising from the application of these products or the information given in this brochure.

Photo credits: ANKER-TEPPICHBODEN, Desso, Groz-Beckert

[info@colbond.com](mailto:info@colbond.com)  
[www.colbond.com](http://www.colbond.com)

**A Low & Bonar Company**  
 Performance materials engineered to help build your business

CB-14-GB-A-01/2012